

## ST 111 LONGLIFE

---

Starters for single operation at 230 V AC



### Product features

---

- Temperature range for reliable cut-out: -20...+80 °C

## Technical data


---

### Electrical data

Nominal voltage	220...240 V
Mains frequency	50...60 Hz

### Dimensions & weight


Length	40.3 mm
--------	---------

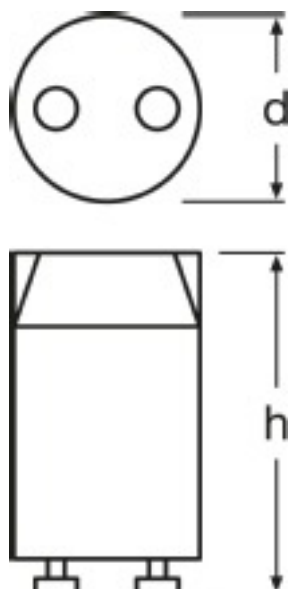

*Product line drawing with letters*

### Additional product data

Footnote used only for product	Not suitable for L 70 W
--------------------------------	-------------------------

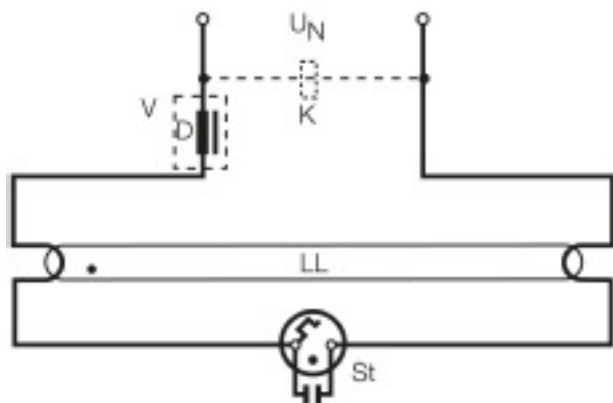

Circuit diagram

**Logistical Data**

Product code	Packaging unit (Pieces/Unit)	Dimensions (height x width x length)	Gross weight	Volume
4050300064000	Blister 2	105 mm x 24 mm x 140 mm	34.09 g	0.35 dm <sup>3</sup>
4050300119588	Shipping carton box 20	150 mm x 154 mm x 165 mm	321.27 g	3.81 dm <sup>3</sup>
4050300270166	Unpacked 1	22 mm x 19 mm x 35 mm	5.57 g	0.01 dm <sup>3</sup>
4050300270173	Shipping carton box 1200	325 mm x 235 mm x 400 mm	8086.00 g	30.55 dm <sup>3</sup>
4050300854045	Unpacked 1	21 mm x 19 mm x 37 mm	4.00 g	0.01 dm <sup>3</sup>
4050300797861	Tray 25	111 mm x 41 mm x 111 mm	165.20 g	0.51 dm <sup>3</sup>
4050300797878	Shipping carton box 400	227 mm x 179 mm x 227 mm	2748.83 g	9.22 dm <sup>3</sup>

## Disclaimer

---

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.