

HALOSTAR ST 20 W 12 V G4

HALOSTAR STAR | Low-voltage halogen lamps with pin base



- Kitchen lighting
- Mirror lighting
- Lighting for reading
- Entrance lighting
- Shops
- Restaurants, hotels and similar prestigious applications
- Offices, public buildings

Product benefits

- Brilliant accent light
- Incredibly small dimensions for revolutionary new luminaire designs
- Approved for use in open luminaires (to IEC 60598-1)
- UV filter

Product features

- Average life: 2,000 h
- 100 % dimmable
- Color rendering index R_a : 100
- Base: G4, GY6.35

Technical data

Electrical data


Rated wattage	20 W
Nominal wattage	20 W
Nominal voltage	12 V
Rated power factor λ	1.00

Light technical data

Nominal luminous flux	320 lm
Rated luminous flux	320 lm
Color temperature	2800 K
Color rendering index Ra	100
Starting time	0.0 s
Warm-up time (60 %)	0 s
Lumen main.fact.at end of nom.life time	0.80

Dimensions & weight

Length	33.0 mm
Overall length	33.0 mm
Diameter	10.0 mm
Light center length (LCL)	30.0 mm
Outer bulb	T10

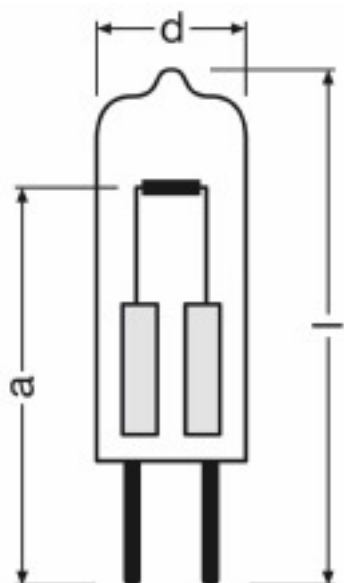

Product line drawing with letters

Colors & materials

Lamp mercury content	0.0 mg
Mercury-free	Yes

Lifespan

Nominal lamp life time	2000 h
Rated lamp life time	2000 h
Number of switching cycles	1000000 ¹⁾

¹⁾ At 1 s on / 1 s off

Additional product data

Base (standard designation)	G4
-----------------------------	----

Capabilities

Dimmable	Yes
Burning position	Any

Country specific categorizations

ILCOS	HSGST/UB-20-12-G4
Order reference	64425

Logistical Data

Product code	Packaging unit (Pieces/Unit)	Dimensions (height x width x length)	Gross weight	Volume
4008321201836	Blister 2	67 mm x 14 mm x 122 mm	11.58 g	0.11 dm ³
4008321201843	Shipping carton box 20	148 mm x 130 mm x 164 mm	204.50 g	3.16 dm ³

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.